IP Camera Quick Installation Guide

VLC Media Player 2.0.6[or Higher version] Setup

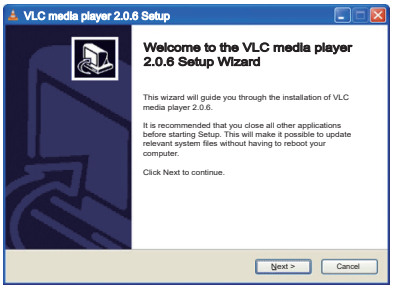

1. Install the 'vlc-2.0.6-win32-weldex-certification. exe' executable file.

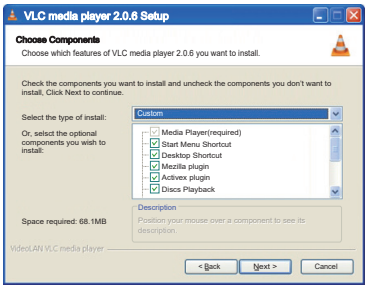

2. From the [Select the type of install] dropdown menu, choose [custom].
3. Confirm the installation path and click[Next] to start copying files to the PC.

4. Uncheck the [Run VLC media player 2.0.6] checkbox
5. Click on the [Finish] button to complete the installation.

IP Scan Software Setup

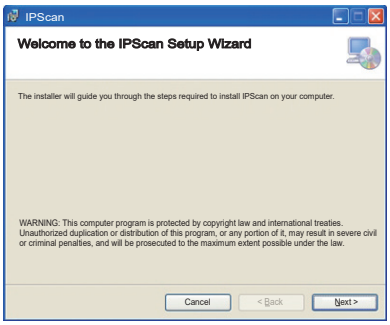

① Install the latest 'IPScan software' executable file.

② Run the IP Scan shortcut icon on main screen.

Change the Camera's Network settings

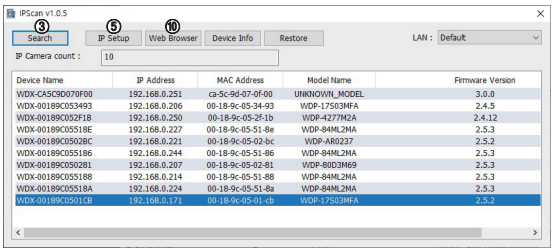





③ Click Search on the IPScan window.
④ Click the row of the device you wish to configure.
⑤ Click the IP Setup icon.
⑥ Enter the admin's password. default password is [admin]
⑦ If you want to change IP address, enter a valid IP address, Subnet mask, and Gateway.
⑧ You can select the IP service type such as DHCP, Static IP.
⑨ Click Apply icon and wait for 30 seconds.
⑩ Click Web Browser icon.

Web Viewer Login

⑪ You will be prompted to enter an username and password. default username is [admin] and default password is [admin].
⑫ After a successful login, the WEB Viewer screen will be displayed in your web browser.

For more information, refer to the IP Camera User Operation Manual.

Rev. A

Access the IP Camera Setup page on Web Viewer

Video Profile Setup

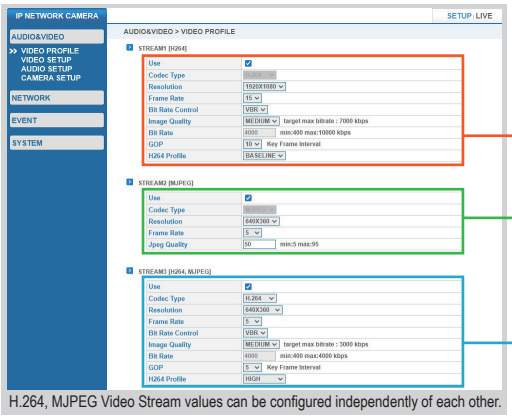

H.264, MJPEG Video Stream values can be configured independently of each other.

- **Default Resolution : 1920x1080**
  640x360, 800x450, 960x540, 1280x720, 1440x810, 1600x900, 1920x1080, 2048x1536
- Frame rate : 1 ~ 30 (Default : 15fps)
- Bit Rate Control : CBR / VBR
- Image Quality : LOW/ MEDIUM/ HIGH
  Default : MEDIUM
- GOP : 1 ~ 30

- **Default Resolution : 640x360**
- Frame rate : 1 ~ 30 (Default : 5fps)
- JPEG Quality : 5 ~ 95
  Default : 50

- **Default Resolution : 640x360**
  352x240, 640x360, 800x450, 960x540, 1280x720
- Frame rate : 1 ~ 30 (Default : 5fps)
- Bit Rate Control : CBR / VBR
- Image Quality
  : LOW/ MEDIUM/ HIGH
  Default : MEDIUM
- GOP : 1 ~ 30

Maintenance Setup

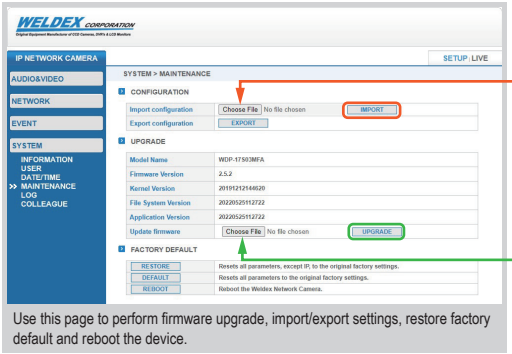

Use this page to perform firmware upgrade, import/export settings, restore factory default and reboot the device.

- **Import Setup**
  Click on the [Choose File] button and select the configuration file [sysenv.cfg] from the connected PC.
  Click [IMPORT] to apply the configuration file settings.
  after a few seconds, the device will reboot.



- **Upgrade Setup**
  Click [Choose File] icon and select the firmware file as above picture.
  Click [UPGRADE] icon to start the upgrade process.
  The upgrade progress bar will display the status of the upgrade.
  after a few minutes, the device will reboot.
  After a successful upgrade, [Complete] message window will pop-up.

Software Download

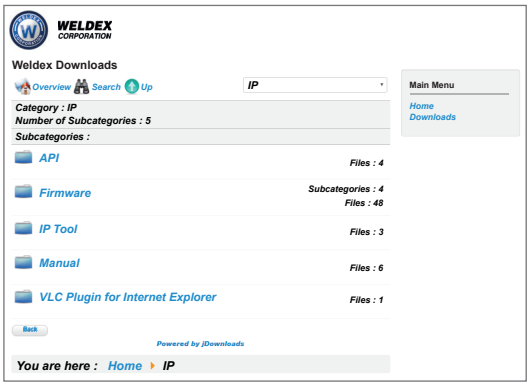

For software download, refer to below website address.

https://downloads.weldex.com/

www.weldex.com / oem@weldex.com
Tel : (714)761-2100[USA]
Fax : (714)761-3811[USA]
Tel : 49-8142-651490[GERMANY]
Fax : 49-8142-651-4920[GERMANY]